




## AA TYPE (ONE-HAND QUICK COUPLING)

Connecting with the plug of CA type








Major Applicable Fluid~

Stainless Steel: Frozen Lubricant/Acid/Brine

Brass: Oil/Fresh Water/Air

Steel: Circulating Lubricant/Fresh Water/Air

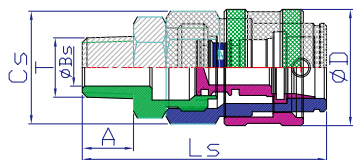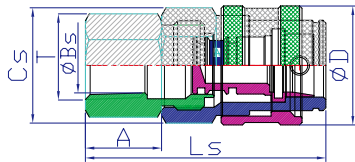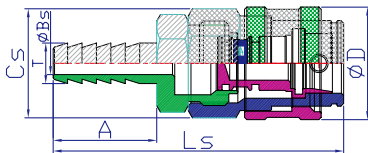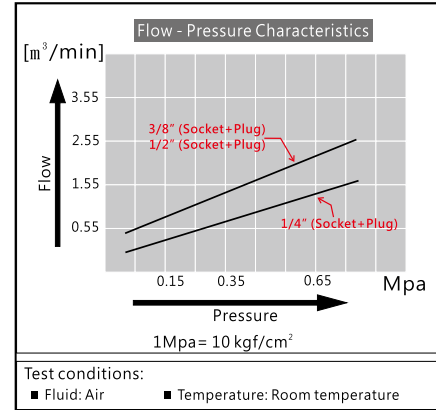

Computer No	Product Sign	Dimension (mm)						Weight (g)			Quantity per Carton
		Ls	D	Cs	A	T	Bs	SS41	BRASS	SUS	
SUS	20SH	62.6	25	Ø24*6HEX*21D	23	7.2	3.5	88	95	89	240-B
A2335AAJA	25SH	62.6	25	Ø24*6HEX*21D	23	9	5	88	96	90	240-B
BRASS	30SH	62.6	25	Ø24*6HEX*21D	23	11.3	7	89	97	90	240-B
A0135AAJA	40SH	62.6	25	Ø24*6HEX*21D	23	14.5	10.5	90	98	91	240-B
SS41											
A1135AAJA											

Computer No	Product Sign	Dimension (mm)						Weight (g)			Quantity per Carton
		Ls	D	Cs	A	T	Bs	SS41	BRASS	SUS	
SUS	10SF	49.5	25	Ø24*6HEX*21D	12	PT1/8"28P	8.5	92	100	93	240-B
A2335AAJA	20SF	49.5	25	Ø24*6HEX*21D	13	PT1/4"19P	11	95	103	96	240-B
BRASS	30SF	50.6	25	Ø24*6HEX*21D	15	PT3/8"19P	13.5	104	113	105	240-B
A0135AAJA	40SF	51.6	25	Ø24*6HEX*21D	16	PT1/2"14P	18	113	123	115	240-B
SS41											
A1135AAJA											

Computer No	Product Sign	Dimension (mm)						Weight (g)			Quantity per Carton
		Ls	D	Cs	A	T	Bs	SS41	BRASS	SUS	
SUS	10SM	48.6	25	Ø24*6HEX*21D	9	PT1/8"28P	5	86	93	87	240-B
A2335AAJA	20SM	52.5	25	Ø24*6HEX*21D	11	PT1/4"19P	8	86	93	87	240-B
BRASS	30SM	52.6	25	Ø24*6HEX*21D	13	PT3/8"19P	10.5	89	97	90	240-B
A0135AAJA	40SM	53.6	25	Ø24*6HEX*21D	14	PT1/2"14P	14.8	100	108	101	240-B
SS41											
A1135AAJA											

Computer No	Product Sign	Dimension (mm)						Weight (g)			Quantity per Carton
		Ls	D	Cs	A	T	Bs	SS41	BRASS	SUS	
SUS	20SP	46.4	25	Ø24*6HEX*21D	11.5	4*6	3	90	98	91	240-B
A2335AAJA	25SP	52.6	25	Ø24*6HEX*21D	13	5*8	4	93	101	94	240-B
BRASS	30SP	55.1	25	Ø24*6HEX*21D	15.5	6.5*10	5	96	104	97	240-B
A0135AAJA	40SP	54.6	25	Ø24*6HEX*21D	17	8*12	6.5	105	114	106	240-B
SS41											
A1135AAJA											

- Max. pressure: 10Kg/cm<sup>2</sup>
- Operating temp. range: A2335AAJA=VITON -20°C ~ +180°C
- Uses: Pneumatic pressure hose, Pneumatic tools, Air pressure machine, Automatic assembly machine.
- Brass mark: A0135AAJA > -20°C ~ +80°C
- Steel mark: A1135AAJA > -20°C ~ +80°C
- Special seal(Packing) temperature range: -50°C ~ +300°C

Dimension of T: NPT, BSP, etc. are available to produce besides PT. (Welcome to order special threads)