
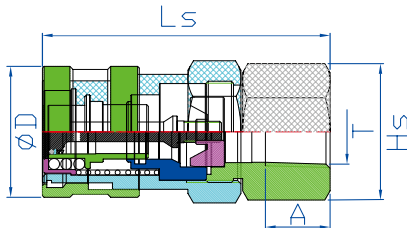


## FN TYPE FLAT FACE QUICK COUPLING


Major Applicable Fluid~

Carbon Steel: Frozen Lubricant/Fresh Water/Operation Lubricant/Gas/Air/Vacuum

 Double Shut-off



Computer No	Product Sign	Dimension (mm)					Weight (g)	Quantity per Carton
		Ls	D	Hs	A	T		
A8115FNMA	02SF	48.1	28	Ø23.6*6HEX*22D	12	PT1/4"19P	140.5	120-B
A8115FNMA	03SF	67	30.6	Ø25.4*6HEX*27.7D	17.8	PT3/8"19P	214	96-B
A8115FNMA	04SF	84.1	38.5	Ø38.2*6HEX*35D	19	PT1/2"14P	497	60-B
A8115FNMA	06SF	91	46.6	Ø48.7*6HEX*44D	15.8	PT3/4"14P	782	32-B
A8115FNMA	08SF	104.9	57.2	Ø55.8*6HEX*50.8D	25	PT 1"11P	1285	20-B



Computer No	Product Sign	Dimension (mm)					Weight (g)	Quantity per Carton
		Lp	C	Hp	A	T		
A8115FNMA	02PF	48.1	36	Ø23.6*6HEX*22D	11.8	PT1/4"19P	87.5	200-B
A8115FNMA	03PF	56	39.3	Ø25.9*6HEX*24D	12.7	PT3/8"19P	115.5	200-B
A8115FNMA	04PF	72.8	46.7	Ø38.2*6HEX*35D	23.2	PT1/2"14P	300	60-B
A8115FNMA	06PF	84.4	57.7	Ø45.6*6HEX*41D	24	PT3/4"14P	501.5	40-B
A8115FNMA	08PF	91	64.7	Ø52.3*6HEX*47.5D	25	PT 1"11P	716	32-B

### FEATURES

1. High pressure double shut-off valve designed. Valve is composed of socket and plug.
2. Suitable connect with high-pressure air hoses and hydraulic equipments.
3. Material: Carbon Steel.


### NOTICES

- Dash size of socket & plug must be equal for connecting.
- To avoid feculence drops into coupler & sticks on seal is very important. It may be cause leak.

Coupling Releasing



Coupling Fitting

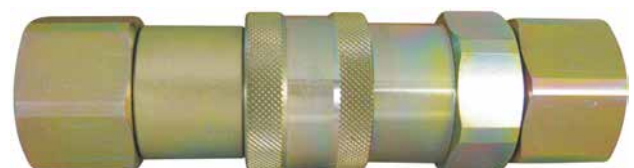

Max. pressure: Kg/cm<sup>2</sup> 2HSP 3HSP 4HSP 6HSP 8HSP  
350 350 350 350 350

Operating temp. range: -20°C ~ +80°C

Special seal(Packing) temperature range: -50°C ~ +300°C

Uses: Hydraulic machine, Construction machinery, Agricultural machinery

Dimension of T: NPT, BSP, etc. are available to produce besides PT. (Welcome to order special threads)