




ZA TYPE (OXYGEN & ACETYLENE QUICK COUPLING) FOR STEEL BOTTLE USE


 Double Shut-off &

 Single Shut-off


Major Applicable Fluid~ Brass=Iron: Oxygen / Acetylene / Air




Computer No	Product Sign	Dimension (mm)						Weight (g)	Quantity per Carton
		Lp	C	Zp	A	T	Bp		
AOOZJAZAP	20T	47.4	21	Ø19.4*6HEX*17D	10	M16*1.5PL	4.6	36	50-A




Computer No	Product Sign	Dimension (mm)						Weight (g)	Quantity per Carton
		Lp	C	Zp	A	T	Bp		
AOOZJAZAP	20A	47.4	21	Ø19.4*6HEX*17D	10	M16*1.5PL	4.6	34	50-A




Computer No	Product Sign	Dimension (mm)						Weight (g)	Quantity per Carton
		Lp	C	Zp	A	T	Bp		
AOOZJAZAP	206	63	21	14	24	6.5	4.6	25	50-A
AOOZJAZAP	208	65	21	14	26	9	4.6	29	50-A




Computer No	Product Sign	Dimension (mm)						Weight (g)	Quantity per Carton
		Lp	C	Zp	A	T	Bp		
AOOZJAZAP	206A	63	21	14	24	6.5	4.6	23	50-A
AOOZJAZAP	208A	65	21	14	26	9	4.6	27	50-A




Computer No	Product Sign	Dimension (mm)						Weight (g)	Quantity per Carton
		Ls	D	Hs	A	T	Bs		
AOOZJAG	S2	50	22	Ø21.8*6HEX*19D	11	M16*1.5PL	3.9	80	50-A




Computer No	Product Sign	Dimension (mm)						Weight (g)	Quantity per Carton
		Lp	C	Zp	A	T	Bp		
AOOZJAZAP	10T	45.9	19.4	Ø19.4*6HEX*17D	10	M16*1.5P	3.6	30	50-A




Computer No	Product Sign	Dimension (mm)						Weight (g)	Quantity per Carton
		Lp	C	Zp	A	T	Bp		
AOOZJAZAP	10A	45.9	19.4	Ø19.4*6HEX*17D	10	M16*1.5P	3.6	28	50-A



Computer No	Product Sign	Dimension (mm)						Weight (g)	Quantity per Carton
		Lp	C	Zp	A	T	Bp		
AOOZJAZAP	106	61.4	19.4	14	24	6.5	3.6	20	50-A
AOOZJAZAP	108	63.4	19.4	14	26	9	3.6	24	50-A



Computer No	Product Sign	Dimension (mm)						Weight (g)	Quantity per Carton
		Lp	C	Zp	A	T	Bp		
AOOZJAZAP	106A	61.4	19.4	14	24	6.5	3.6	18	50-A
AOOZJAZAP	108A	63.4	19.4	14	26	9	3.6	22	50-A

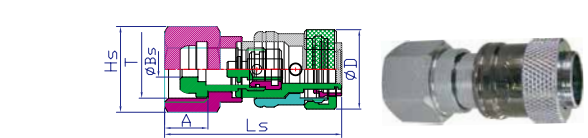

Computer No	Product Sign	Dimension (mm)						Weight (g)	Quantity per Carton
		Ls	D	Hs	A	T	Bs		
AOOZJAG	S1	48.2	20	Ø21.8*6HEX*19D	11	M16*1.5P	3.9	70	50-A

Max. pressure: 10Kg/cm²

Special seal(Packing) temperature range: -50°C ~ +300°C

Uses: Active / Inertia / Chemical Gas · Vehicle · Mark For Piping Operating temp. range: -20°C ~ +80°C